QUIETWALK® MAX

PREMIUM UNDERLAYMENT & WATER DEFENSIVE BARRIER

Designed for use with:

- Vinyl Plank
- Hybrid Resilient
- Laminate
- Hardwoods & Bamboo

* **Provides enhanced performance for attached pad flooring**

CLICK/FLOAT

NAIL DOWN

GLUE DOWN

Water Protection

Resists Compression From Daily Traffic

Sound Reduction

Insulating Value

Made From Recycled Materials

Antimicrobial Treated Fibers

Recommended For Pad Attached Flooring

The secret's in the **SILVER!**

QuietWalk Max features a unique attached metalized vapor barrier that provides thermal reflectivity. This increases your overall home energy efficiency and helps keep it comfortable throughout the year!

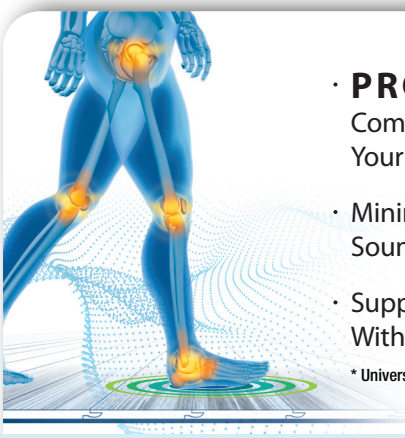

- **PROVEN** To Increase Comfort By Reducing Force To Your Joints*
- Minimizes Impact Energy & Sound Transmission
- Supports Your Floor, Especially With Pad Attached Planks

* University Study

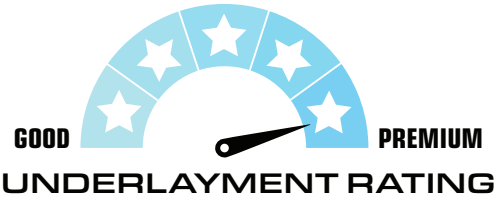

UNDERLAYMENT RATING

Customer Reviews

★★★★★

Saved my bamboo floor

"Had minor flood damage for an unknown amount of time. This underlayment took all the damage and protected the flooring from mold. I was able to reuse the existing flooring over NEW underlayment! Good stuff."

★★★★★

Great product

"Great product, durable, and easy to install. The floors are very quiet with this underlay, and it does help make the flooring feel "warmer."

Scan to view installation videos, warranty and tips!

RATED RESIDENTIAL AND COMMERCIAL

PROUDLY Made in the U.S.A.

QUIETWALK® MAX Features & Specifications

The secret's in the SILVER!

QuietWalk MAX's unique silver film not only provides thermal reflectivity to help keep your home comfortable; it also acts as an unmatched defensive barrier that protects your investment from damaging moisture and high PH levels which may occur in concrete subfloors.

Antimicrobial treated fibers inhibit mold and mildew growth

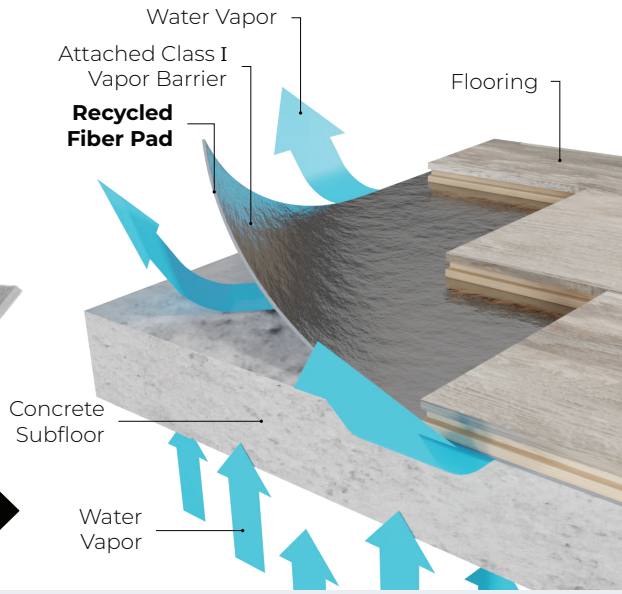

Combined with its thick, dense, antimicrobial fiber pad, QuietWalk MAX's unique vapor barrier becomes part of a powerful water management system that aggressively wicks bulk moisture and allows it to dissipate over time while blocking high subfloor PH levels to protect the floor above.

SUPERIOR SOUND ABSORPTION

Fiber construction absorbs impact and ambient sound to create a better living space for everyone!

IIC △ Delta: 26

The higher the STC & IIC number, the better the noise control!

(STC) 67
AMBIENT SOUND

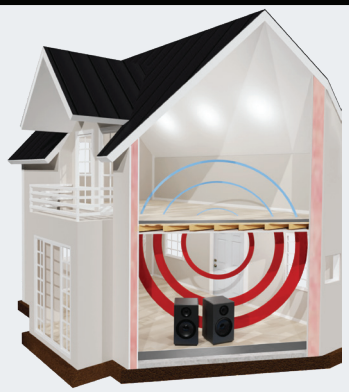

(IIC) 73
IMPACT SOUND

SMOOTHS MINOR SUB-FLOOR IMPERFECTIONS

Firm and supportive helping with subfloor roughness which cuts down on subfloor prep and provides extra support for planks even with pad attached.

SUITABLE FOR USE WITH IN-FLOOR HEATING SYSTEMS

RECYCLED FIBERS

Patented process re-purposes fibers otherwise going to our landfills.

USGBC MEMBER

Can contribute to green building credits as outlined with the USGBC.

GREENGUARD GOLD certified for low emissions, conforming to Indoor Air Quality standards and Collaborative for High Performance Schools (CHPS) - CA Section 01350.

Scan to view installation videos, warranty and tips!

RATED RESIDENTIAL AND COMMERCIAL

Scan for current pallet & truck configurations, or visit www.mpglobalproducts.com/packout-information/

ADDS INSULATION VALUE

Helps home insulation and provides additional comfort during seasonal changes by adding an **R-Value of 0.61** to a floor system!

SUPPORT FOR PAD ATTACHED FLOORING

Dense, uncrushable fiber pad provides continuous support for floor joints where pre-attached pads can't reach.

TECHNICAL DATA

- **Materials:** Blended recycled synthetic fibers, polyethylene film and inert hot-melt adhesive
- **Lip & Tape Included:** Yes
- **Antimicrobial Protection:** Yes
- **Weight:** 10 lbs/100 ft² roll · 38 lbs/360 ft² roll
- **Thickness:** 1.9 mm
- **Density:** 16.04 lbs/ft³
- **Compression Set:** 8.8%
- **Compression Resistance:** 278.9 psi
- **R-Value (@ 1.4mm):** 0.61hr-ft²-degF/Btu
- **WVTR:** 0.1 lbs/1000 ft² /24 hrs
- **Perm Rating:** 0.06
- **Subfloor Moisture Emissions Allowance:** NO LIMIT
- **Approved Subfloors:** All properly prepared concrete and wood materials
- **Flammability:** Meets or exceeds Federal Flammability Standards: 1-70 (Pill Test)
- **Warranty:** Transferable LTD Lifetime

REV 08/2025 DOC#815323